




Fusion WallTex

Fusion WallTex is a 100% polywoven printable media with the benefit of being easy to install and change. Suitable for internal applications like shop fit-outs, the office or even residential.

Fusion WallTex has a matte surface with a unique coating for quick drying, with vibrant colour reproduction and wrinkle-resistant.




Vibrant colour reproduction



Ideal for shop fit-outs



**Suitable for ECO-Solvent,
Solvent, UV and Latex printers**

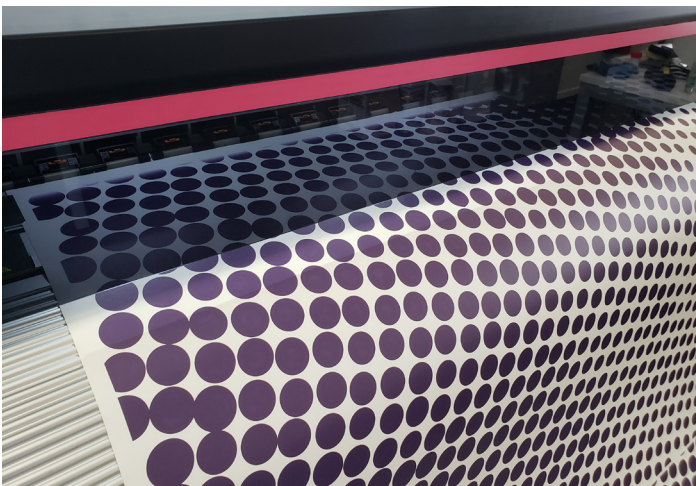

Fusion WallTex Technical Data

Face Film:	Polyester
Thickness:	320 micron
Base Fabric:	180 g/sq.m
Coating:	Water-based waterproofing coating
Adhesive:	Transparent water-based acrylic resin
Release Paper:	Two sides coated paper liner
Release Paper Weight:	120 g/sq.m
Total Thickness:	0.32mm
Whiteness:	Test Method: CIE Ganz 82/w10 93.62%
Opacity:	94.31%
Width available:	1.37m/1.52m
Roll length:	50m
Indoor usage life expectancy:	3 years
Storage Conditions:	about 20 °C and a relative humidity of 50%
Storage Pressure Recommendation:	≤ 6 layers
Shelf life	1 year (unprinted)

NOTE: All above information shall only used as a guide; buyers shall independently test and determine the products suitability. The mentioned data are average of test result and should not be used for the purpose of lawsuit or warranty.