

Entrance



ORABOND® UHB® Tape

The high-performance ORABOND® UHB® - (Ultra High Bond) acrylic tapes are the latest addition to ORAFOL's double-sided adhesive tape portfolio.

The UHB®-Range is currently available in white, grey and clear, as well as in various standard sizes. The viscoelastic acrylic (foam) core of these products is designed to offer best results for highly demanding, permanent bonding applications on most surfaces.

Thanks to their viscous (flow) properties, the ORABOND® UHB® Tapes mould perfectly even to rough and structured surfaces. Thus, they reach very strong and load-bearing adhesion levels, whilst at the same time protecting the surface against external agents, e.g. humidity.

The elastic qualities of the ORABOND® UHB® Tapes enhance the inner strength of the tapes, allowing a high absorption capacity of dynamic forces, e.g. shock and impact.

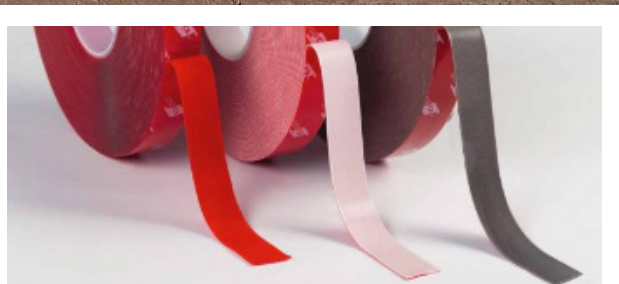

Available in transparent
white and grey



Very strong load bearing
adhesion levels



Versatile uses from interior
design, signs, point of sale
and shop fit outs



ORABOND® UHB® Tape

Brand	ORABOND
Product	UHB03100T
Colour	Transparent
Thickness	1.0mm
Widths	12mm/19mm/25mm
Key Properties	High-strength bonding of transparent material needing an “invisible” joint
Roll Length	33mtrs
Shear strength after 24h (based on ASTM D1002, stainless steel)	0,50 N/mm ² (50 N/cm ²)

Brand	ORABOND
Product	UHB03110W
Colour	White
Thickness	1.1mm
Widths	12mm/19mm/25mm
Key Properties	High performance bonding and mounting of light coloured surfaces
Roll Length	33mtrs
Shear strength after 24h (based on ASTM D1002, stainless steel)	0,62 N/mm ² (62 N/cm ²)

Brand	ORABOND
Product	UHB03110G
Colour	Grey
Thickness	1.1mm
Widths	12mm/19mm/25mm
Key Properties	High performance bonding and mounting of dark coloured surfaces
Roll Length	33mtrs
Shear strength after 24h (based on ASTM D1002, stainless steel)	0,62 N/mm ² (62 N/cm ²)